



UPDATED: 08/02/25 - ADAM KAZDAN

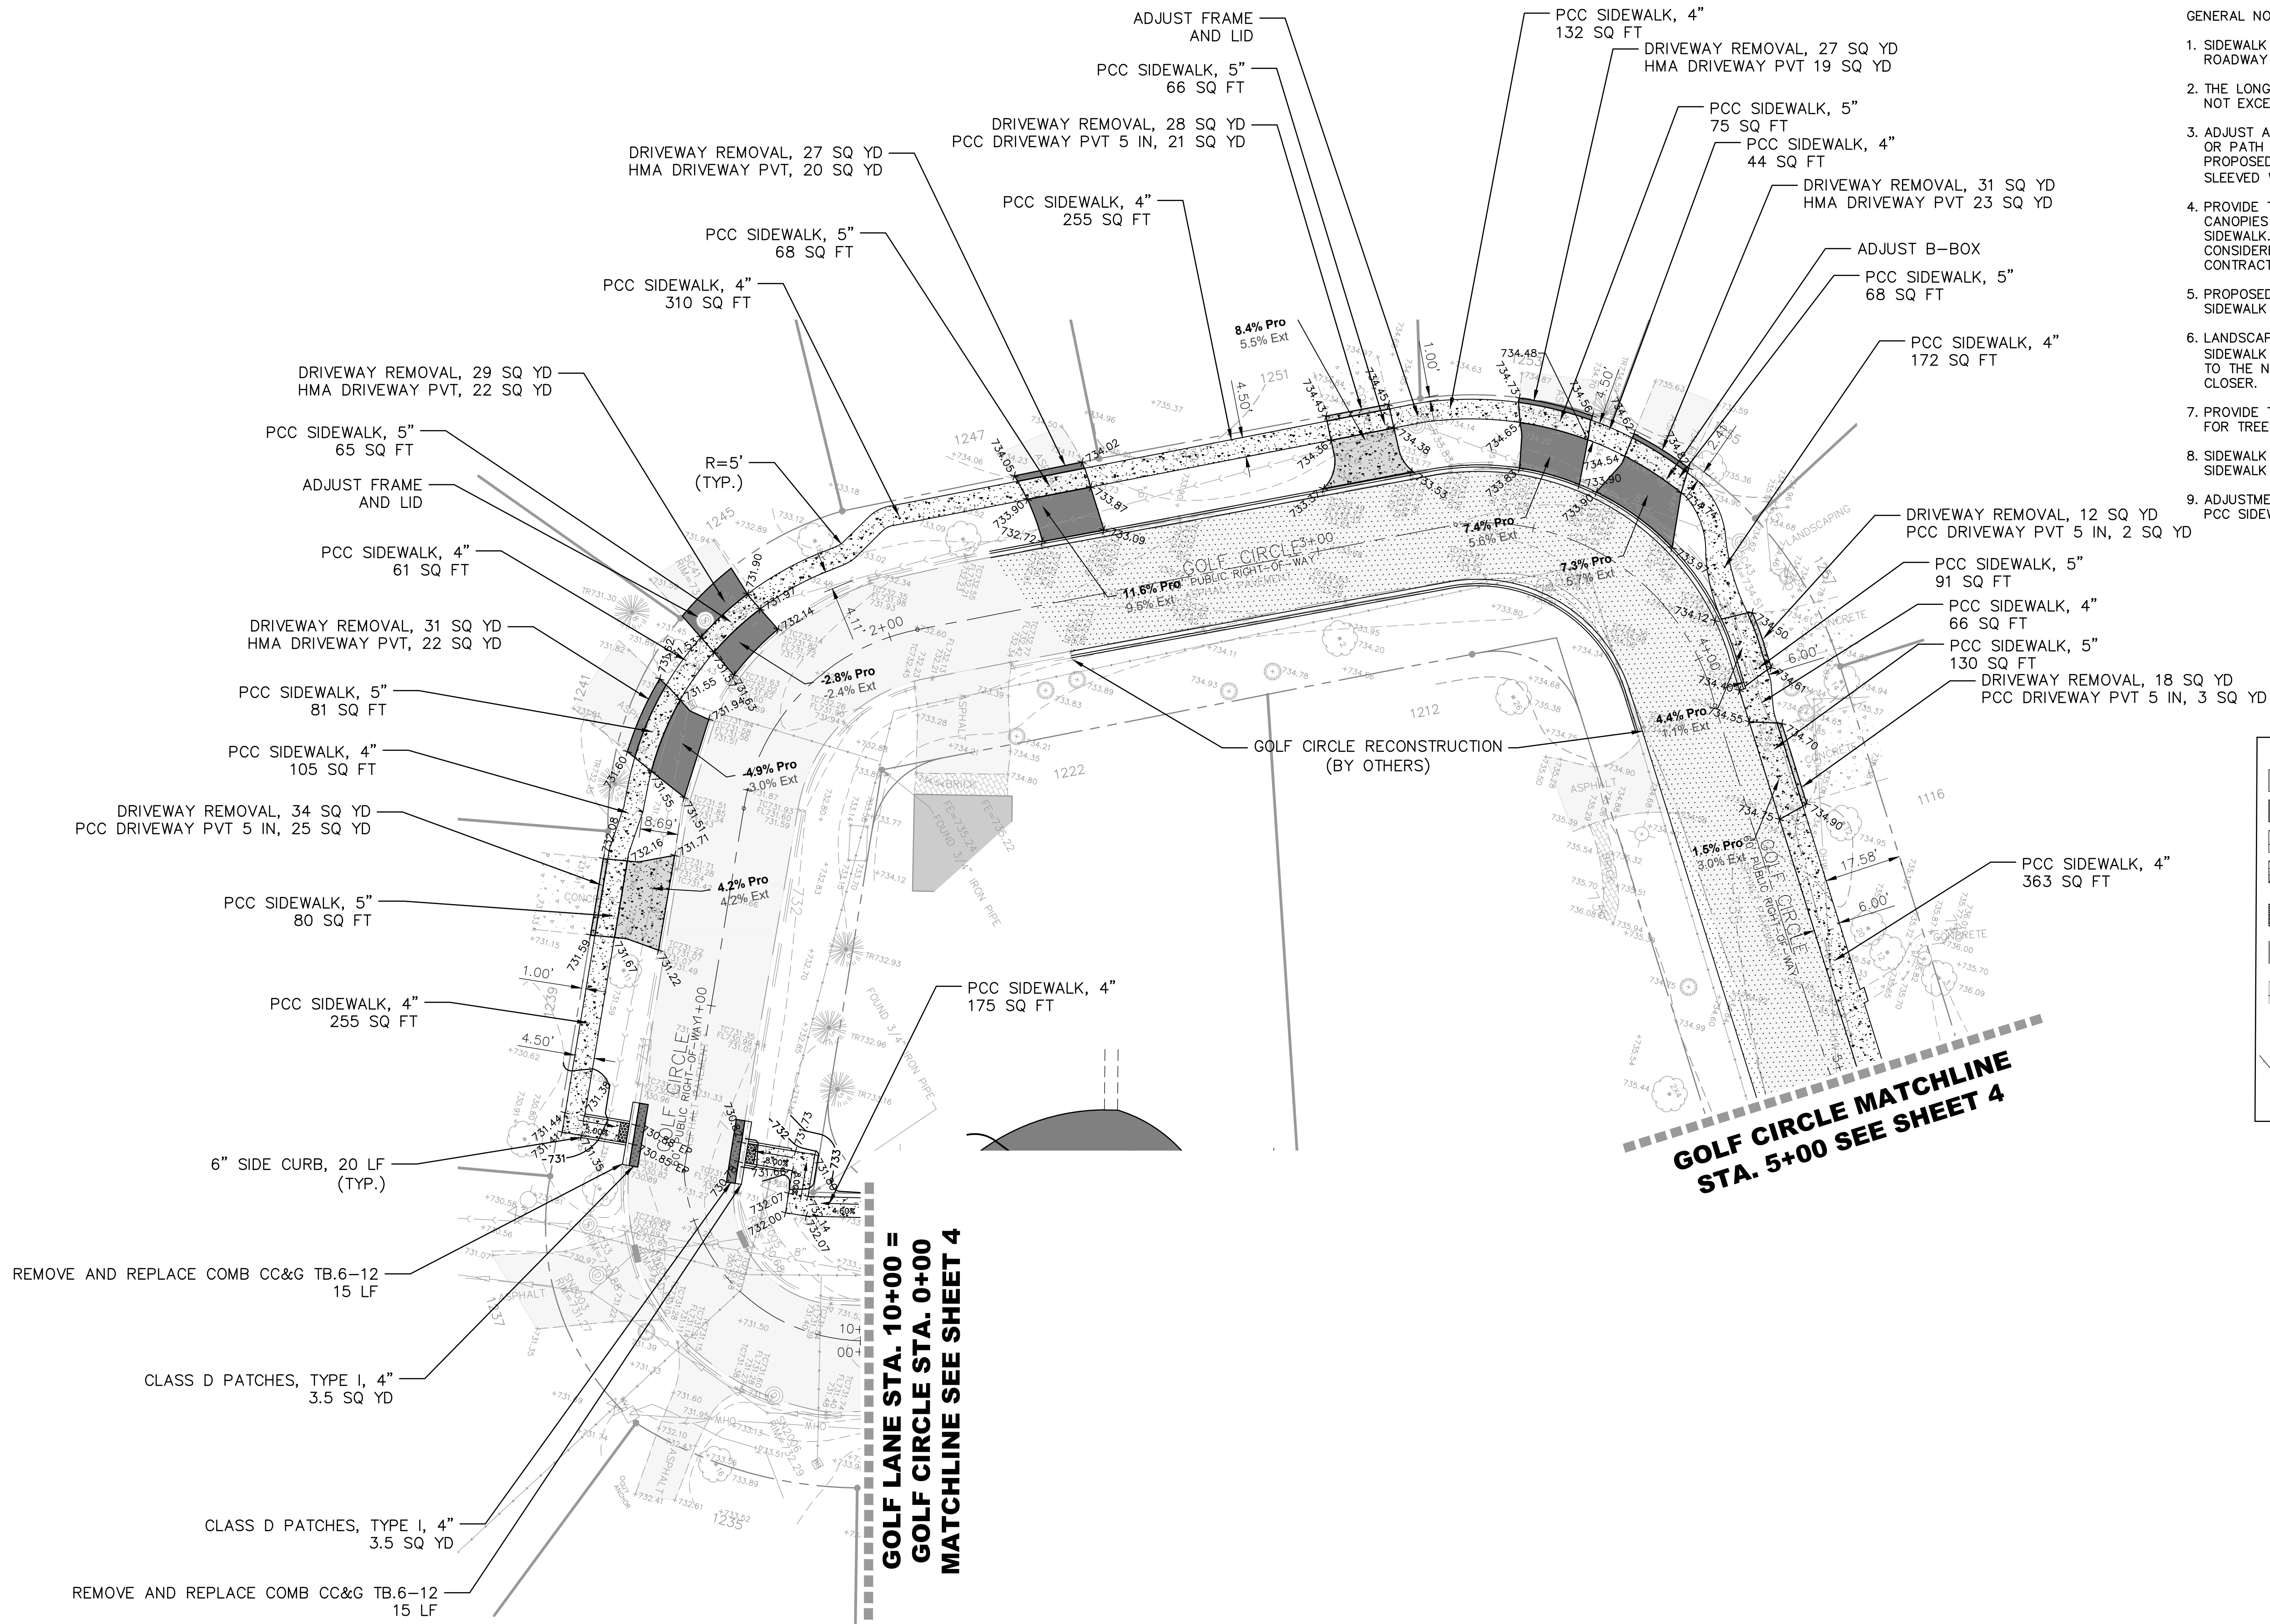

- GENERAL NOTES:
1. SIDEWALK CROSS SLOPE TO BE 1.5% TOWARD THE ROADWAY UNLESS NOTED OTHERWISE.
 2. THE LONGITUDINAL SLOPE OF THE SIDEWALK SHALL NOT EXCEED 8.33%.
 3. ADJUST ANY B-BOXES ENCOUNTERED IN APPROACH OR PATH OF PROPOSED SIDEWALK TO MATCH PROPOSED GRADE. B-BOX ADJUSTMENTS SHALL BE SLEEVED WITH A 4" ADS COUPLING.
 4. PROVIDE TREE ROOT PRUNING WHERE TREE CANOPIES ARE WITHIN LIMITS OF PROPOSED SIDEWALK. TREE ROOT PRUNING SHALL BE CONSIDERED INCIDENTAL TO THE COST OF THE CONTRACT
 5. PROPOSED SIDEWALK SHALL TIE INTO EXISTING SIDEWALK OR DRIVEWAYS AS APPLICABLE
 6. LANDSCAPE RESTORATION ADJACENT TO PROPOSED SIDEWALK SHALL HAVE A MAXIMUM WIDTH OF 4' OR TO THE NEAREST PROPERTY LINE, WHICHEVER IS CLOSER.
 7. PROVIDE TREE PROTECTION PER CITY STANDARDS FOR TREES IN THE ROW.
 8. SIDEWALK CURB IS INCIDENTAL TO THE PCC SIDEWALK QUANTITY.
 9. ADJUSTMENT OF B-BOXES ARE INCIDENTAL TO THE PCC SIDEWALK QUANTITY.

HATCH LEGEND:	
	CLASS B PATCHES, TYPE I, 9"
	CLASS D PATCHES, TYPE I, 4"
	PCC SIDEWALK, 4" OR 5"
	REMOVE & RESET EXISTING PAVERS
	DETECTABLE WARNINGS
	HMA DRIVEWAY PVT REM & REPLACE
	PCC DRIVEWAY PVT 5 IN REM & REPLACE
	TREE REMOVAL
	LINEAR REMOVAL
	INLET PROTECTION

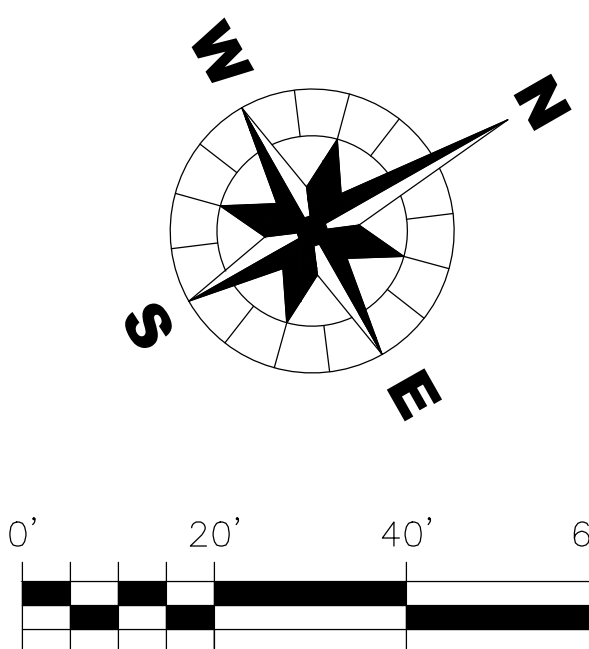

TITLE: WHEATON 2025 FALL SIDEWALK PROGRAM - SECTION 1				PROPOSED PLAN GOLF CIRCLE	
NRH	NRH	AJB	SCALE: AS NOTED	SP252008-SECTION 1_REC.DWG	
DSGN.	DWN.	CHKD.	NATURE OF REVISION		
			NO.	DATE	
CLIENT: CITY OF WHEATON 303 W. WESLEY STREET WHEATON, IL 60187 630-260-2000					
PROJECT NO. 252008					
DATE: 04/04/25					
DRAWING NO. SP3					
SHEET:					
3 OF 5					

WBK
ENGINEERING

WBK ENGINEERING, LLC
116 WEST MAIN STREET, SUITE 201
ST. CHARLES, ILLINOIS 60174
(630) 443-7755

