
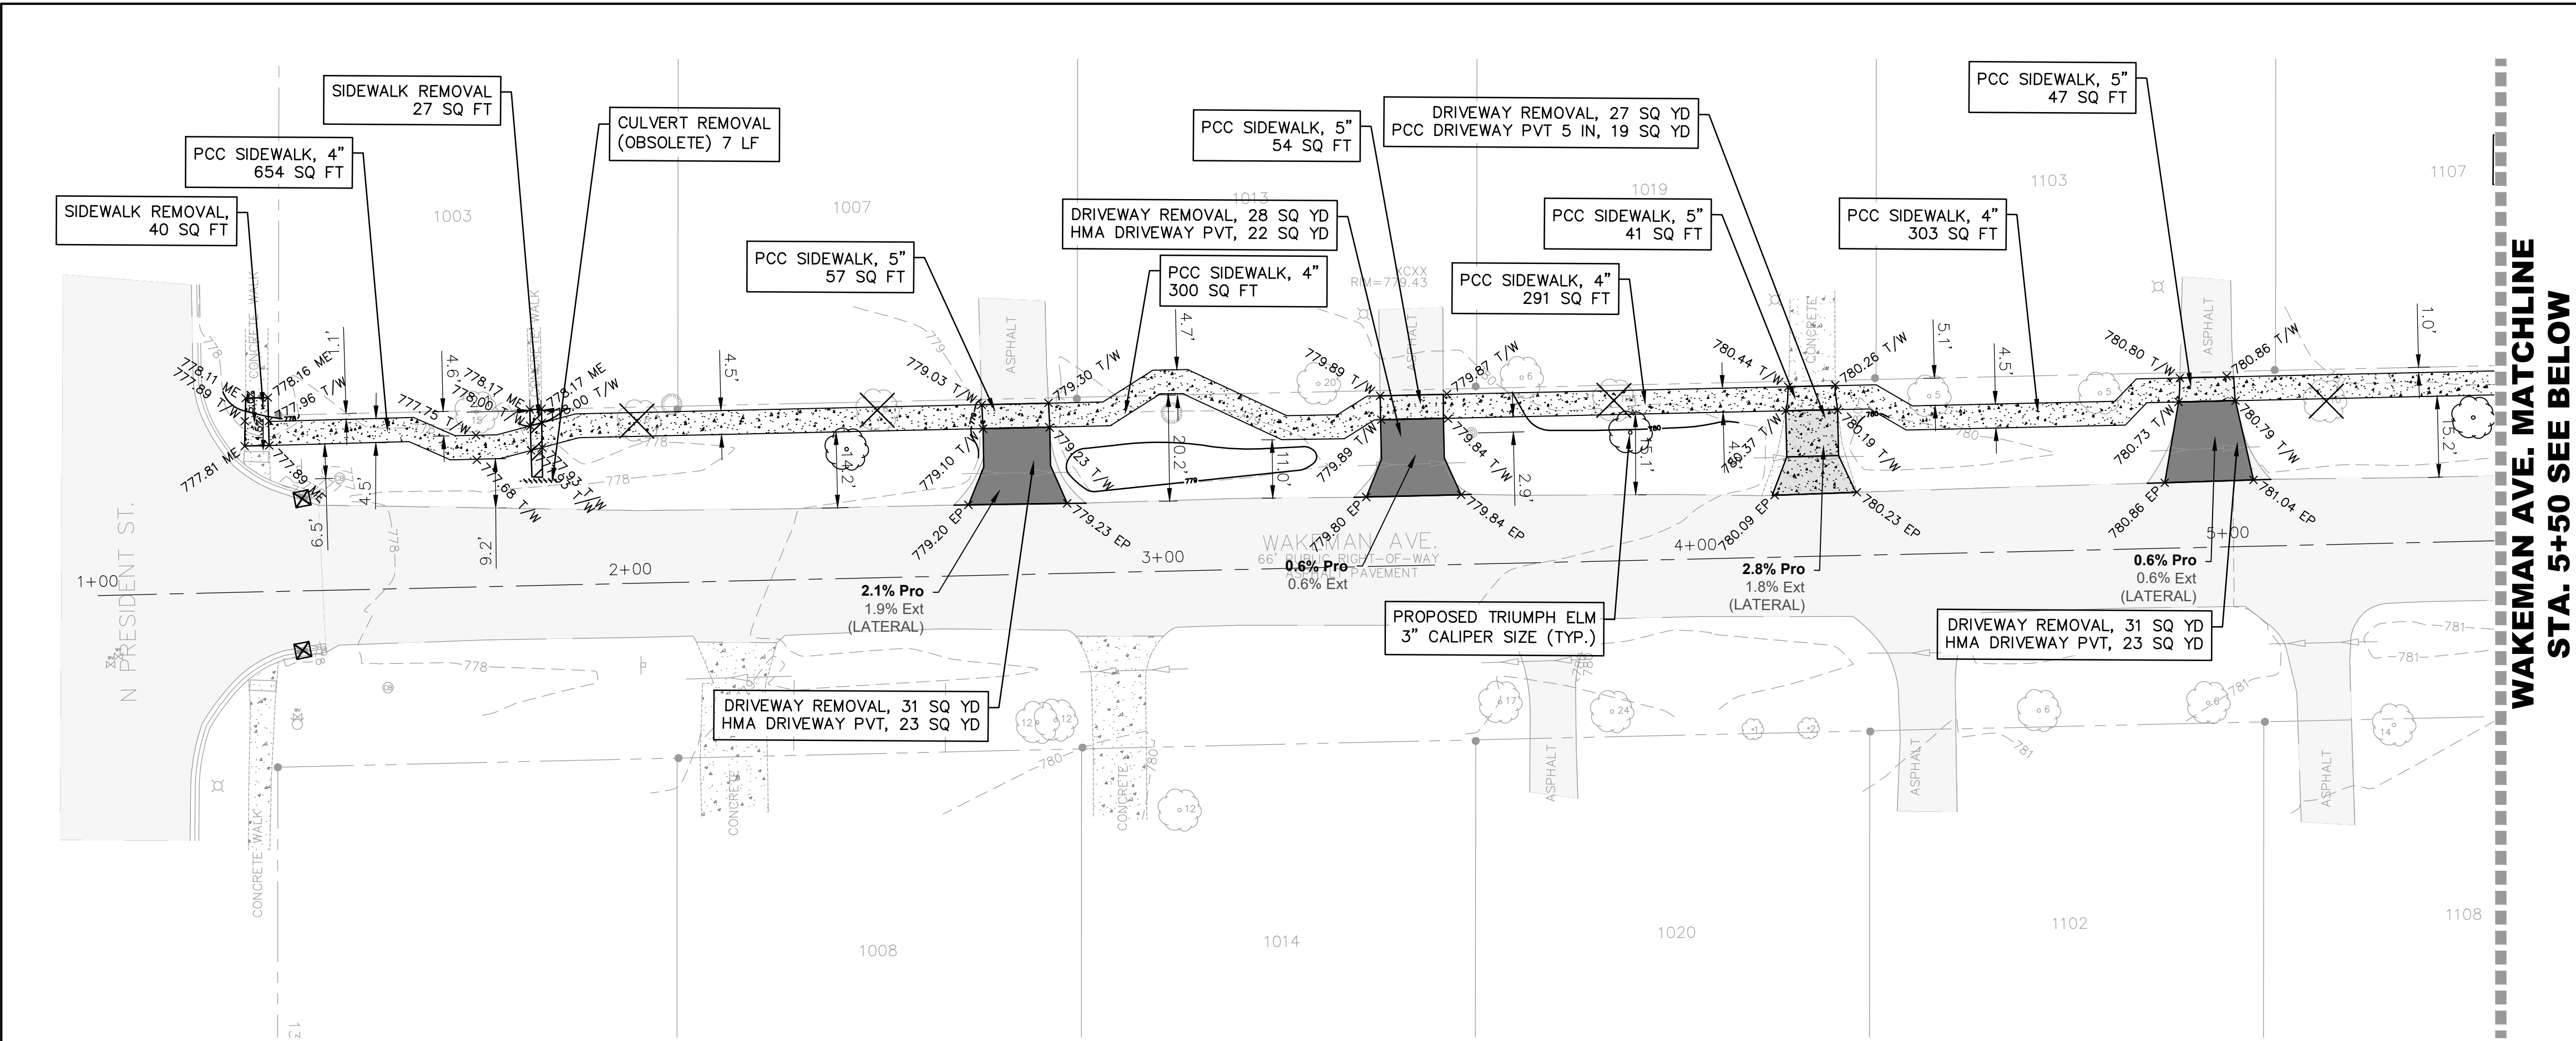


UPDATED: 6/20/25 - ADAM KAZDAN

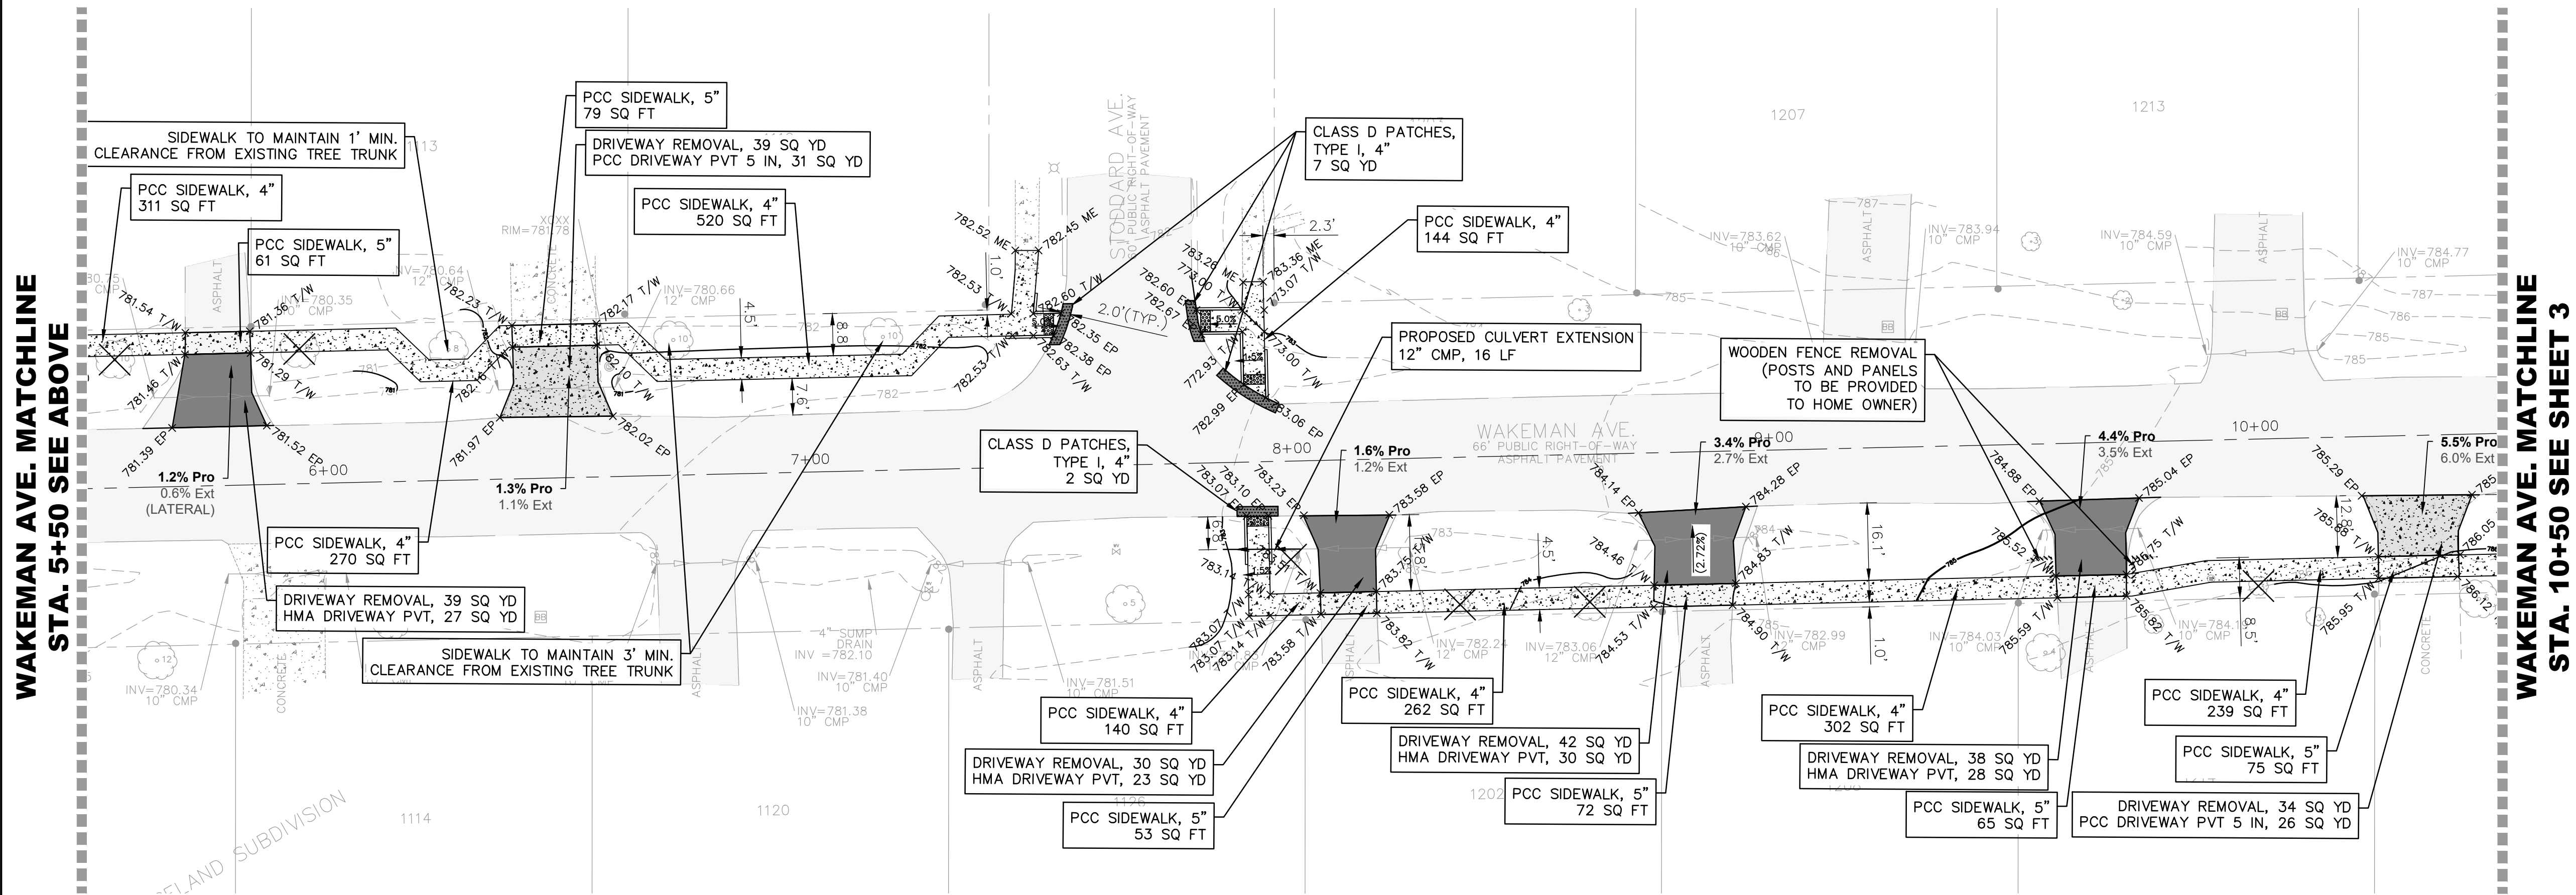

HATCH LEGEND:	
	CLASS D PATCHES, TYPE I, 4"
	PCC SIDEWALK, 4" OR 5"
	REMOVE & RESET EXISTING PAVERS
	DETECTABLE WARNINGS
	HMA DRIVEWAY PVT REM & REPLACE
	PCC DRIVEWAY PVT 5 IN REM & REPLACE
	TREE REMOVAL
	LINEAR REMOVAL
	INLET PROTECTION

- GENERAL NOTES:
- SIDEWALK CROSS SLOPE TO BE 1.5% TOWARD THE ROADWAY UNLESS NOTED OTHERWISE.
 - THE LONGITUDINAL SLOPE OF THE SIDEWALK SHALL NOT EXCEED 8.33%.
 - ADJUST ANY B-BOXES ENCOUNTERED IN APPROACH OR PATH OF PROPOSED SIDEWALK TO MATCH PROPOSED GRADE. B-BOX ADJUSTMENTS SHALL BE SLEEVED WITH A 4" ADS COUPLING.
 - PROVIDE TREE ROOT PRUNING WHERE TREE CANOPIES ARE WITHIN LIMITS OF PROPOSED SIDEWALK. TREE ROOT PRUNING SHALL BE CONSIDERED INCIDENTAL TO THE COST OF THE CONTRACT.
 - PROPOSED SIDEWALK SHALL TIE INTO EXISTING SIDEWALK OR DRIVEWAYS AS APPLICABLE.
 - LANDSCAPE RESTORATION ADJACENT TO PROPOSED SIDEWALK SHALL HAVE A MAXIMUM WIDTH OF 4' OR TO THE NEAREST PROPERTY LINE, WHICHEVER IS CLOSER.
 - PROVIDE TREE PROTECTION PER CITY STANDARDS FOR TREES IN THE ROW.
 - SIDEWALK CURB IS INCIDENTAL TO THE PCC SIDEWALK QUANTITY.
 - ADJUSTMENT OF B-BOXES ARE INCIDENTAL TO THE PCC SIDEWALK QUANTITY.
 - SHRUB REMOVAL SHALL BE INCIDENTAL TO THE PCC SIDEWALK QUANTITY.

WBK
ENGINEERING

WBK ENGINEERING, LLC
116 WEST MAIN STREET, SUITE 201
ST. CHARLES, ILLINOIS 60174
(630) 443-7755

PROJECT NO. 252008
DATE: 6/20/25
DRAWING NO. PP1
SHEET:

CITY OF WHEATON
303 W. WESLEY STREET
WHEATON, IL 60187
630-260-2000

NO.	DATE	90% COMMENTS	NATURE OF REVISION
1	9/22/2025		

TITLE: **WHEATON 2025 FALL
SIDEWALK PROGRAM -
SECTION 2**

**PROPOSED PLAN
WAKEMAN AVENUE**

WAKEMAN AVE. MATCHLINE
STA. 10+50 SEE SHEET 2


WAKEMAN AVE. MATCHLINE
STA. 16+00 SEE BELOW

- GENERAL NOTES:
1. SIDEWALK CROSS SLOPE TO BE 1.5% TOWARD THE ROADWAY UNLESS NOTED OTHERWISE.
 2. THE LONGITUDINAL SLOPE OF THE SIDEWALK SHALL NOT EXCEED 8.33%.
 3. ADJUST ANY B-BOXES ENCOUNTERED IN APPROACH OR PATH OF PROPOSED SIDEWALK TO MATCH PROPOSED GRADE. B-BOX ADJUSTMENTS SHALL BE SLEEVED WITH A 4" ADS COUPLING.
 4. PROVIDE TREE ROOT PRUNING WHERE TREE CANOPIES ARE WITHIN LIMITS OF PROPOSED SIDEWALK. TREE ROOT PRUNING SHALL BE CONSIDERED INCIDENTAL TO THE COST OF THE CONTRACT
 5. PROPOSED SIDEWALK SHALL TIE INTO EXISTING SIDEWALK OR DRIVEWAYS AS APPLICABLE
 6. LANDSCAPE RESTORATION ADJACENT TO PROPOSED SIDEWALK SHALL HAVE A MAXIMUM WIDTH OF 4' OR TO THE NEAREST PROPERTY LINE, WHICHEVER IS CLOSER.
 7. PROVIDE TREE PROTECTION PER CITY STANDARDS FOR TREES IN THE ROW.
 8. SIDEWALK CURB IS INCIDENTAL TO THE PCC SIDEWALK QUANTITY.
 9. ADJUSTMENT OF B-BOXES ARE INCIDENTAL TO THE PCC SIDEWALK QUANTITY.
 10. SHRUB REMOVAL SHALL BE INCIDENTAL TO THE PCC SIDEWALK QUANTITY.

HATCH LEGEND:	
	CLASS D PATCHES, TYPE I, 4"
	PCC SIDEWALK, 4" OR 5"
	REMOVE & RESET EXISTING PAVERS
	DETECTABLE WARNINGS
	HMA DRIVEWAY PVT REM & REPLACE
	PCC DRIVEWAY PVT 5 IN REM & REPLACE
	TREE REMOVAL
	LINEAR REMOVAL
	INLET PROTECTION

WAKEMAN AVE. MATCHLINE
STA. 16+00 SEE ABOVE

WAKEMAN AVE. MATCHLINE
STA. 21+00 SEE SHEET 4

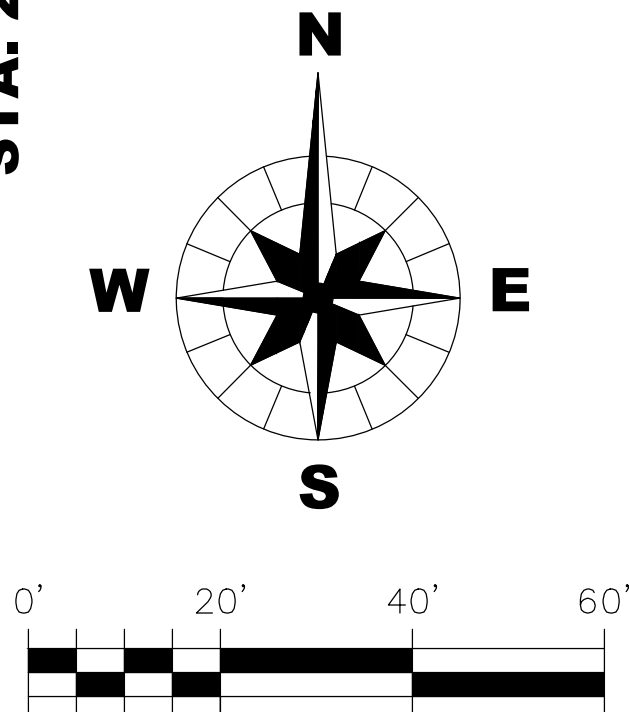

TITLE: **WHEATON 2025 FALL
SIDEWALK PROGRAM -
SECTION 2**
**PROPOSED PLAN
WAKEMAN AVENUE**

DSGN.	NRH	NRH	AJB	CHKD.	SCALE : AS NOTED	90% COMMENTS	NATURE OF REVISION
						1 9/22/2025	
						NO.	DATE

CLIENT: **CITY OF WHEATON
303 W. WESLEY STREET
WHEATON, IL 60187
630-260-2000**

WBK **ENGINEERING**
WBK ENGINEERING, LLC
116 WEST MAIN STREET, SUITE 201
ST. CHARLES, ILLINOIS 60174
(630) 443-7755

PROJECT NO. 252008
DATE : 6/20/25
DRAWING NO. **PP2**
SHEET:

