



UPDATED: 8/10/25 - ADAM KRAZON

WAKEMAN AVE. MATCHLINE
STA. 21+00 SEE SHEET 3

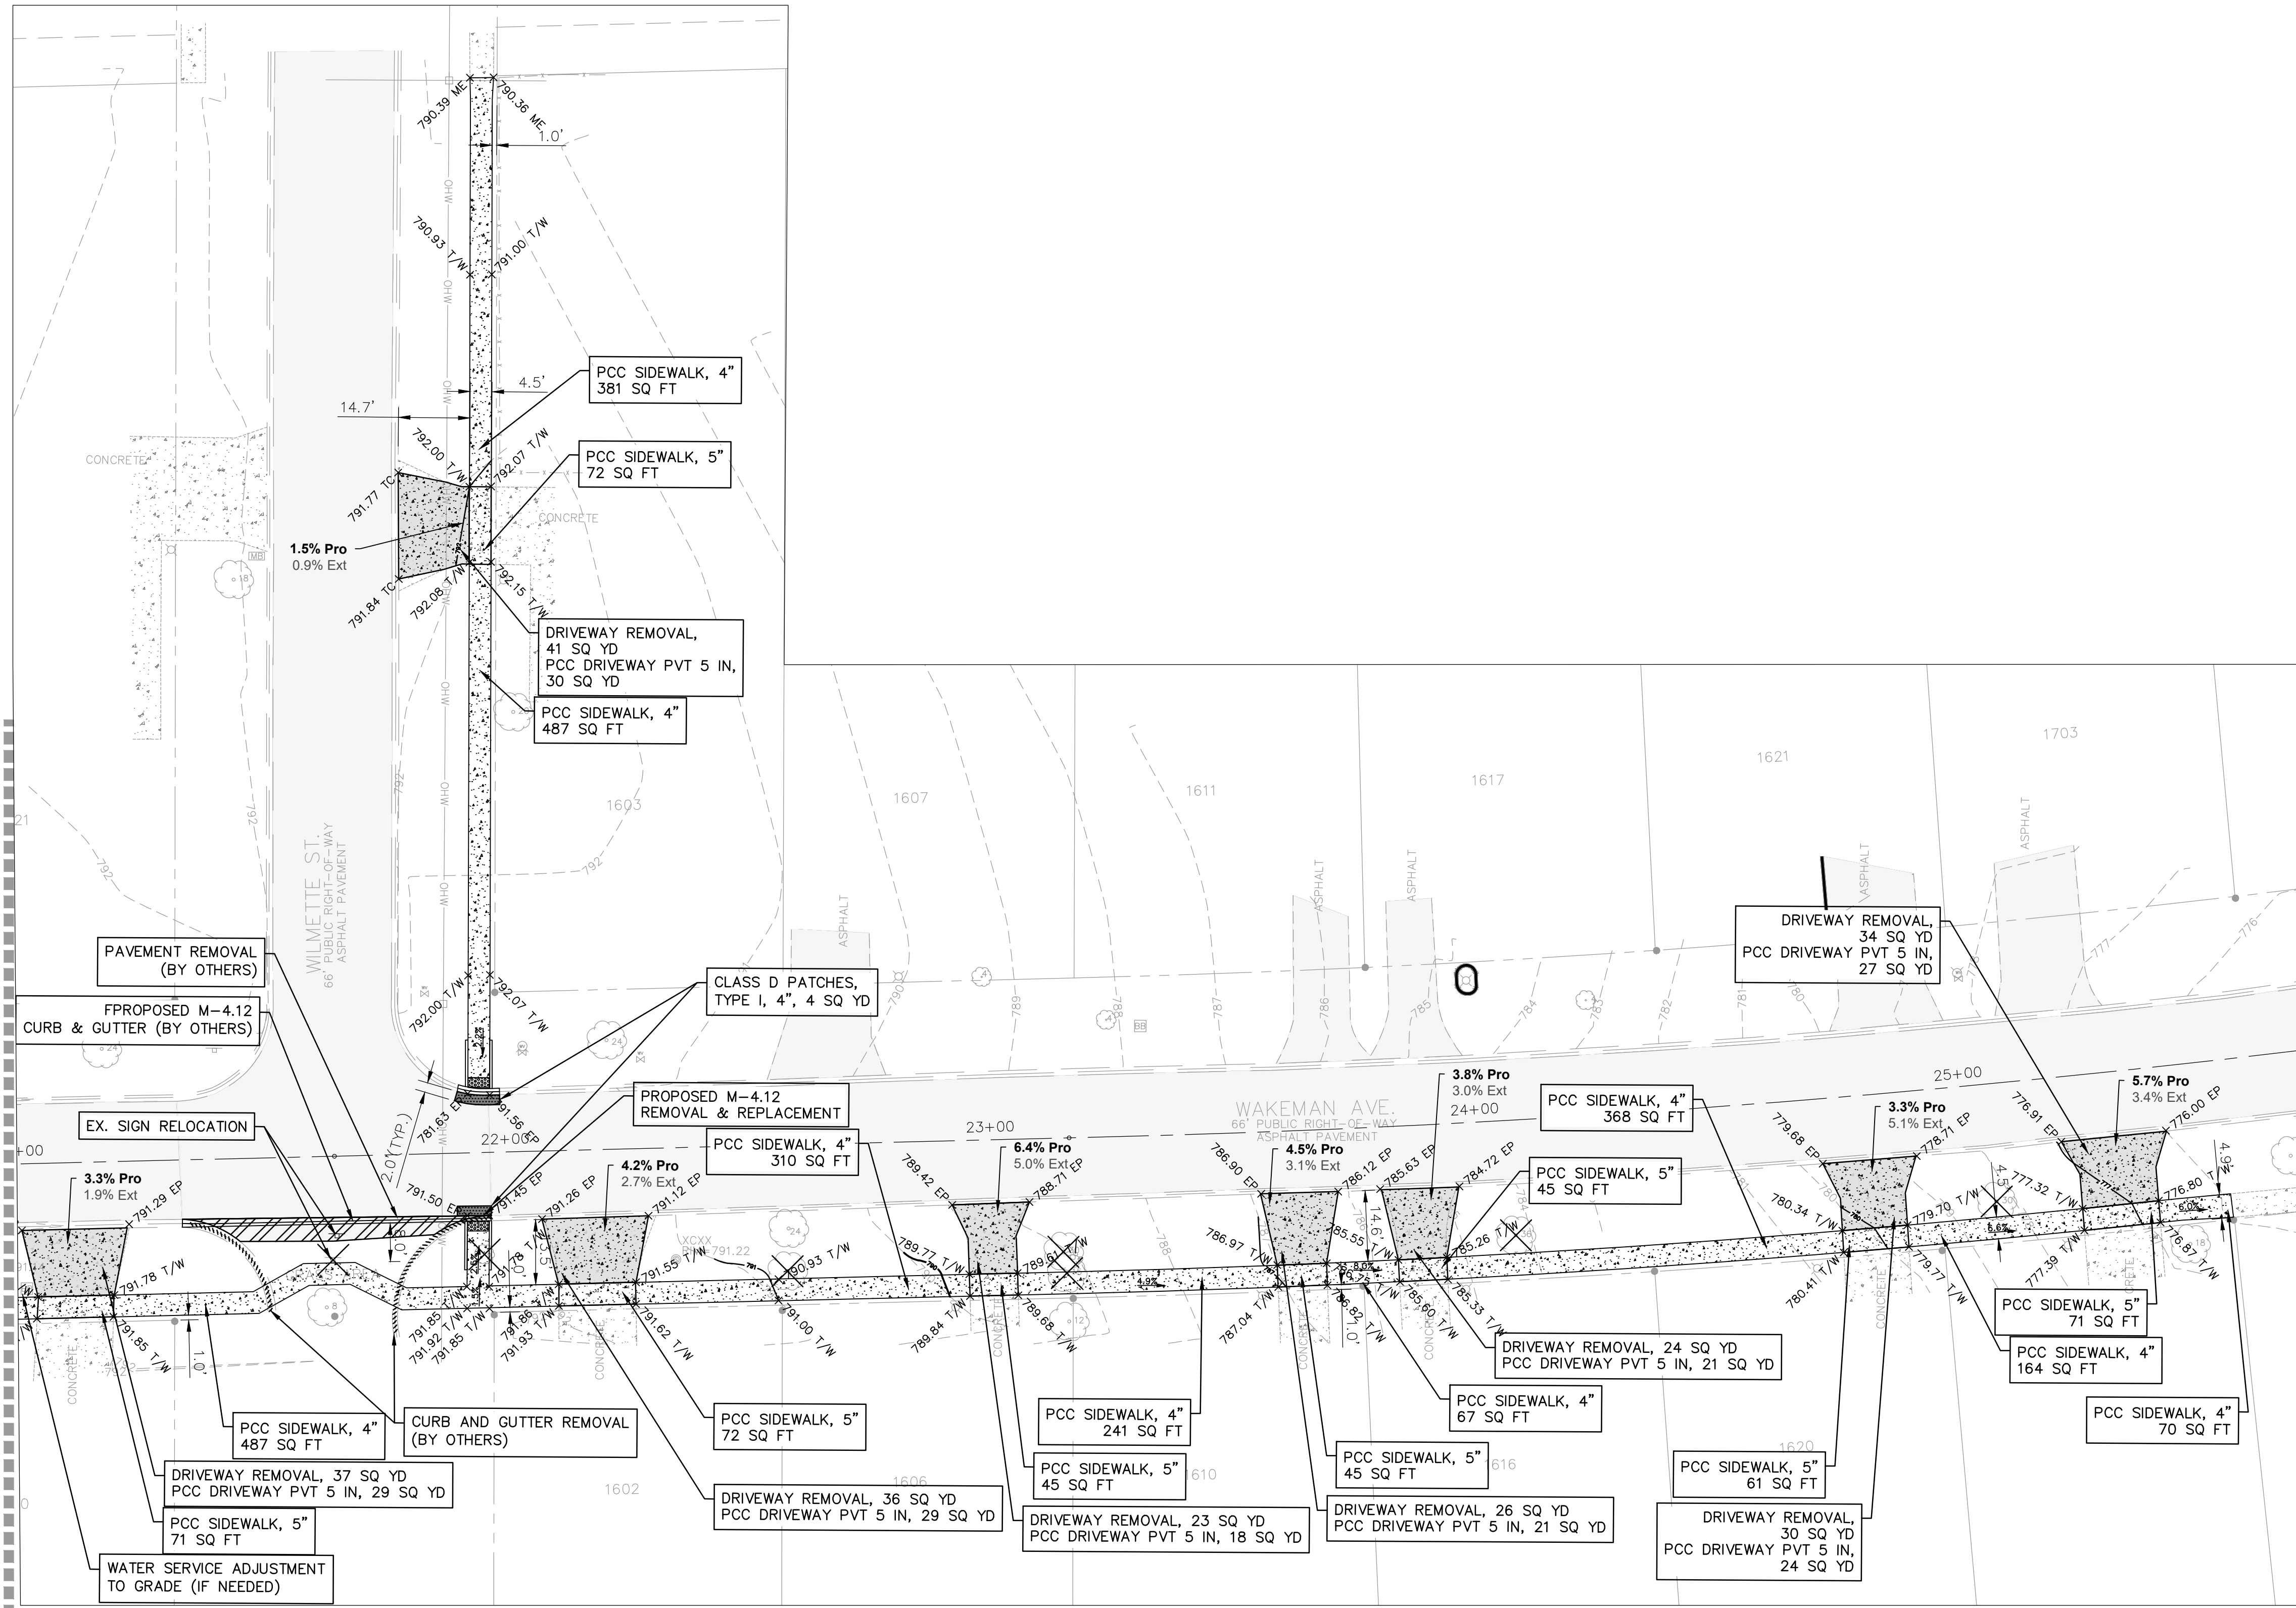

- GENERAL NOTES:
- SIDEWALK CROSS SLOPE TO BE 1.5% TOWARD THE ROADWAY UNLESS NOTED OTHERWISE.
 - THE LONGITUDINAL SLOPE OF THE SIDEWALK SHALL NOT EXCEED 8.33%.
 - ADJUST ANY B-BOXES ENCOUNTERED IN APPROACH OR PATH OF PROPOSED SIDEWALK TO MATCH PROPOSED GRADE. B-BOX ADJUSTMENTS SHALL BE SLEEVED WITH A 4" ADS COUPLING.
 - PROVIDE TREE ROOT PRUNING WHERE TREE CANOPIES ARE WITHIN LIMITS OF PROPOSED SIDEWALK. TREE ROOT PRUNING SHALL BE CONSIDERED INCIDENTAL TO THE COST OF THE CONTRACT.
 - PROPOSED SIDEWALK SHALL TIE INTO EXISTING SIDEWALK OR DRIVEWAYS AS APPLICABLE.
 - LANDSCAPE RESTORATION ADJACENT TO PROPOSED SIDEWALK SHALL HAVE A MAXIMUM WIDTH OF 4' OR TO THE NEAREST PROPERTY LINE, WHICHEVER IS CLOSER.
 - PROVIDE TREE PROTECTION PER CITY STANDARDS FOR TREES IN THE ROW.
 - SIDEWALK CURB IS INCIDENTAL TO THE PCC SIDEWALK QUANTITY.
 - ADJUSTMENT OF B-BOXES ARE INCIDENTAL TO THE PCC SIDEWALK QUANTITY.
 - SHRUB REMOVAL SHALL BE INCIDENTAL TO THE PCC SIDEWALK QUANTITY.

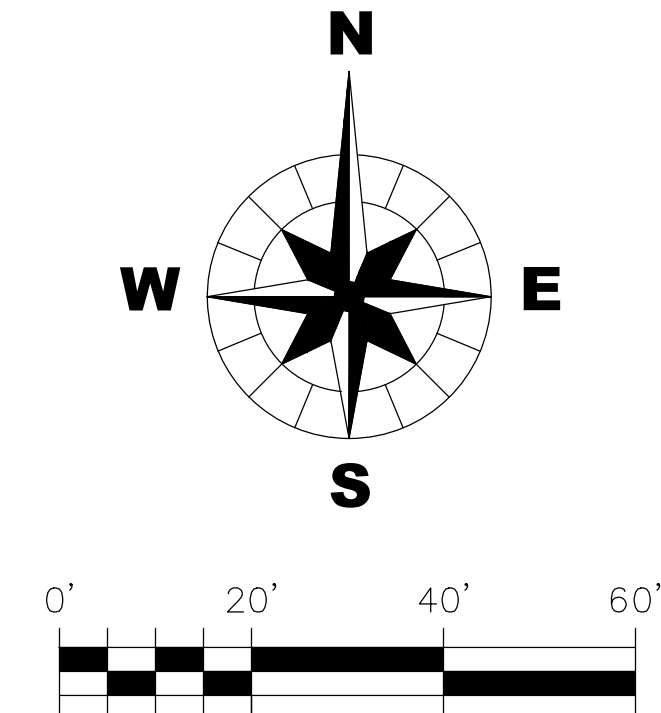

HATCH LEGEND:	
	CLASS D PATCHES, TYPE I, 4"
	PCC SIDEWALK, 4" OR 5"
	REMOVE & RESET EXISTING PAVERS
	DETECTABLE WARNINGS
	HMA DRIVEWAY PVT REM & REPLACE
	PCC DRIVEWAY PVT 5 IN REM & REPLACE
	TREE REMOVAL
	LINEAR REMOVAL
	INLET PROTECTION

TITLE: WHEATON 2025 FALL SIDEWALK PROGRAM - SECTION 2		PROPOSED PLAN WAKEMAN AVENUE	
DSGN.	NRH	NRH	AJB
DWN.	NRH	NRH	AJB
CHKD.	NRH	NRH	AJB
SCALE: AS NOTED		90% COMMENTS	
NO.		DATE	
1		9/2/2025	
NATURE OF REVISION		SP252008-SECTION 2.DWG	

CLIENT:		CITY OF WHEATON 303 W. WESLEY STREET WHEATON, IL 60187 630-260-2000	
WBK ENGINEERING, LLC 116 WEST MAIN STREET, SUITE 201 ST. CHARLES, ILLINOIS 60174 (630) 443-7755		PROJECT NO. 252008	
DATE: 6/20/2025		DRAWING NO. PP3	
SHEET:		4 OF 18	